

## PATENT COOPERATION TREATY

From the INTERNATIONAL SEARCHING AUTHORITY

To:

KIM, Won-Joon

5F., Shinwon B/D., 648-15 Yeoksam-dong, Kangnam-gu Seoul  
135-911 Republic of Korea**PCT**NOTIFICATION OF RECEIPT  
OF SEARCH COPY

(PCT Rule 25.1)

Date of mailing  
(day/month/year) 21 JULY 2006 (21.07.2006)

Applicant's or agent's file reference

PCT06-06

**IMPORTANT NOTIFICATION**

International application No.

**PCT/KR2006/002342**

International filing date (day/month/year)

**19 JUNE 2006 (19.06.2006)**

Priority date (day/month/year)

Applicant

**U-GENTECH CO., LTD et al**

## 1. Where the International Searching Authority and the receiving Office are not the same Office:

The applicant is hereby notified that the search copy of the international application was received by this International Searching Authority on the date indicated below.

## Where the International Searching Authority and the receiving Office are the same Office:

The applicant is hereby notified that the search copy of the international application was received on the date indicated below.

19 JULY 2006 (19.07.2006)

(date of receipt).

2. ☐ The search copy was accompanied by nucleotide and/or amino acid sequence listing or tables related thereto in electronic form.
3. ☐ The search copy contained a nucleotide and/or amino acid sequence listing or tables related thereto in electronic form.
4. Time limit for establishment of international search report and written opinion of the International Searching Authority  
The applicant is informed that the time limit for establishing the international search report and the written opinion of the International Searching Authority is three months from the date of receipt indicated above or nine months from the priority date, whichever time limit expires later (Rules 42.1 and 43bis.1(a)).
5. A copy of this notification has been sent to the International Bureau and, where the first sentence of paragraph 1 applies, to the receiving Office.

Name and mailing address of ISA/KR


Korean Intellectual Property Office  
920 Dunsan-dong, Seo-gu, Daejeon 302-701,  
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

COMMISSIONER

Telephone No. 82-42-481-5207



## PCT REQUEST

Print Out (Original in Electronic Form)

0	For receiving Office use only	
0-1	International Application No.	
0-2	International Filing Date	
0-3	Name of receiving Office and "PCT International Application"	
0-4	Form PCT/RO/101 PCT Request	
0-4-1	Prepared Using	PCT-SAFE Version 3.50 (Build 0002.170)
0-5	Petition The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty	
0-6	Receiving Office (specified by the applicant)	Korean Intellectual Property Office (RO/KR)
0-7	Applicant's or agent's file reference	PCT06-06
I	Title of Invention	INTERNAL ANTENNA FOR MOBILE PHONE <u>AND</u> MANUFACTURING METHOD THEREOF
II	Applicant	
II-1	This person is	applicant only
II-2	Applicant for	all designated States except US
II-4	Name	U-GENTECH CO., LTD
II-5	Address	74-1 Sinchun 3-dong, Dong-gu Daegu 701-825 Republic of Korea
II-6	State of nationality	KR
II-7	State of residence	KR
II-8	Telephone No.	82-2-514-7676
II-9	Facsimile No.	82-2-512-8791
III-1	Applicant and/or inventor	
III-1-1	This person is	applicant and inventor
III-1-2	Applicant for	US only
III-1-4	Name (LAST, First)	BAE, Jang-Hwan
III-1-5	Address	102-1001 Kolon Apt., 861 Jakjeon 2-dong, Gyeyang-gu Incheon 407-823 Republic of Korea
III-1-6	State of nationality	KR
III-1-7	State of residence	KR

## PCT REQUEST

Print Out (Original in Electronic Form)

IV-1	Agent or common representative; or address for correspondence The person identified below is hereby/ has been appointed to act on behalf of the applicant(s) before the competent International Authorities as:	agent
IV-1-1	Name (LAST, First)	KIM, Won-Joon
IV-1-2	Address	5F., Shinwon B/D., 648-15 Yeoksam-dong, Kangnam-gu Seoul135-911 Republic of Korea
IV-1-3	Telephone No.	82-2-555-2623
IV-1-4	Facsimile No.	82-2-555-2621
IV-1-5	e-mail	ceo@finepat.com
IV-1-6	Agent's registration No.	9-2000-000412-1
V	DESIGNATIONS	
V-1	The filing of this request constitutes under Rule 4.9(a), the designation of all Contracting States bound by the PCT on the international filing date, for the grant of every kind of protection available and, where applicable, for the grant of both regional and national patents.	
V-2	Item V-2 may be used to exclude (irrevocably) the designations concerned in order to avoid the ceasing of the effect, under the national law, of an earlier national application from which priority is claimed. As to the consequences of such national law provisions in these and certain other States, see Designations in PCT-SAFE Help.	KR
VI-1	Priority Claim	NONE
VII-1	International Searching Authority Chosen	Korean Intellectual Property Office (ISA/KR)

**【DESCRIPTION】****【Invention Title】**

INTERNAL ANTENNA FOR MOBILE PHONE AND MANUFACTURING METHOD THEREOF

**【Technical Field】**

<1> The present invention relates to a cellular phone antenna and a manufacturing method of the same, and in particular to a cellular phone antenna and a manufacturing method of the same in which a high frequency characteristic and a product safety are enhanced using a cellular phone antenna which is manufactured by preventing an antenna device from being transformed.

**【Background Art】**

<2> Generally, a cellular phone is provided with an antenna for transmitting or receiving radios. An internal antenna, in which an antenna is hidden in an interior of a cellular phone body, has been developed and used.

<3> A conventional internal antenna for a cellular phone is manufactured in such a manner that upper and lower molds are prepared for molding an internal antenna, and an antenna device having a thickness of about 0.5mm is positioned at the lower mold. The upper mold is engaged with the lower mold. An injection molding is performed using a synthetic resin.

<4> However, in a manufacture of a conventional antenna, a relatively thin antenna device may be transformed due to a high pressure, which occurs by a liquid synthetic resin used during an injection molding process, so that a certain product defect may occur due to a poor high frequency characteristic.

<5> In addition, a conventional antenna is molded at about 450°C through 1200°C. The above temperature ranges may be good for a metallic material expansion, but a synthetic resin printed with an antenna component may be transformed in the above temperature ranges.

**【Disclosure】****【Technical Problem】**

<6> Accordingly, it is an object of the present invention to provide a cellular phone antenna and a manufacturing method of the same which overcome

the problems encountered in the conventional art.

<7> It is another object of the present invention to provide a cellular phone antenna and a manufacturing method of the same in which a high frequency characteristic and a product safety are enhanced using a cellular phone antenna which is manufactured by preventing an antenna device from being transformed.

#### 【Technical Solution】

<8> To achieve the above objects, in a cellular phone antenna engaged in an interior of a cellular phone, there is provided a cellular phone antenna which comprises an antenna base which is engaged in an interior of a cellular phone; an antenna which is installed at the antenna base; a connection terminal which is connected with the antenna; and a holder which is attached to the antenna base so that the antenna and the connection terminal are connected.

<9> To achieve the above objects, there is provided a manufacturing method of a cellular phone antenna which comprises a step S1 in which a rectangular antenna base is prepared; a step S2 in which a silk screen device is provided at an upper side of the antenna base for printing in a certain shape; a step S3 in which a metallic paste is provided at the silk screen device; a step S4 in which the metallic paste is printed on the upper side of the antenna base in a certain shape using a spoon member; a step S5 in which the metallic paste printed on the antenna base is hardened and cured; and a step S6 in which a holder engaged with the connection terminal is attached at the antenna base so that the connection terminal is connected with the antenna hardened on the antenna base.

#### 【Advantageous Effects】

<10> Since the antenna according to the present invention is manufactured in a state that an external force is not applied, the antenna is not transformed, so that a high frequency characteristic is not changed, and a degradation problem does not occur. So, the present invention is a very reliable invention.

<11> In addition, a good high frequency characteristic and product safety are obtained since a cellular phone antenna is manufactured in such a manner that an antenna device is not transformed.

**【Description of Drawings】**

<12> The present invention will become better understood with reference to the accompanying drawings which are given only by way of illustration and thus are not limitative of the present invention, wherein:

<13> Figure 1 is a perspective view illustrating a silk screen used for manufacturing a cellular phone antenna according to the present invention;

<14> Figure 2 is a perspective view illustrating a connection terminal before it is attached to a cellular phone antenna according to the present invention;

<15> Figure 3 is a perspective view illustrating a connection terminal after it is attached to a cellular phone antenna according to the present invention; and

<16> Figure 4 is a flow chart of a manufacturing process of a cellular phone antenna according to the present invention.

**【Best Mode】**

<17> The preferred embodiments of the present invention will be described with reference to the accompanying drawings.

<18> Figure 1 is a perspective view illustrating a silk screen used for manufacturing a cellular phone antenna according to the present invention. Figure 2 is a perspective view illustrating a connection terminal before it is attached to a cellular phone antenna according to the present invention. Figure 3 is a perspective view illustrating a connection terminal after it is attached to a cellular phone antenna according to the present invention. Figure 4 is a flow chart of a manufacturing process of a cellular phone antenna according to the present invention.

<19> As shown in Figures 1 through 4, in a cellular phone antenna engaged in an interior of a cellular phone, there is provided a cellular phone antenna which comprises an antenna base 10 which is engaged in an interior of a

cellular phone; an antenna 20 which is installed at the antenna base 10; a connection terminal 30 which is connected with the antenna 20; and a holder 40 which is attached to the antenna base 10 so that the antenna 20 and the connection terminal 20 are connected.

<20> Here, the antenna base 10 is made of a synthetic resin, preferably made of a polycarbonate having a high hardness and tensional strength. The antenna 20 is printed on an upper surface of the antenna base 10 by a spoon member 60 in an antenna shape, with the screen device 50 being provided with a metallic paste. A silk screen is formed on the silk screen device 50 in an antenna shape. The metallic paste may be formed of silver or copper.

<21> The paste is made in a salve type by mixing metallic powder and a base, which is an adhesive. Here, the metallic powder has nano sizes.

<22> Since the metal (silver or copper) used for the paste is hardened at 75 °C and is cured, the antenna base 10 made of synthetic resin coated with paste is not transformed. In addition, the paste is hardened and cured by radiating ultraviolet ray to the paste.

<23> The manufacturing method of the cellular phone antenna according to the present invention will be described.

<24> As shown in Figure 4, a rectangular antenna base 10 is prepared in a step S1. A silk screen device 50 is positioned on the upper side of the antenna base 10 for printing a certain shape in a step S2. A metallic paste is provided at the silk screen device 50 by a certain amount in a step S3. The metallic paste is printed in a certain shape on the upper side of the antenna base 10 by reciprocating the spoon member 60 in a step S4. The metallic paste is hardened and cured by radiating ultraviolet ray to the metallic paste printed on the antenna base 10 or using heat of 75°C in a step S5. A holder 40 engaged with a connection terminal 30 is attached at one side of the antenna base 10 using a certain adhesive so that the connection terminal 30 is connected with the antenna 20 in a step S6.

<25> Here, an adhesive is preferably made of cyanoacrylate having a fast drying speed and a good adhesive strength. An interconnection portion is

processed with silver paste so that the connection terminal 30 and the antenna 20 are permanently connected.

**【Industrial Applicability】**

<26> As described above, since the antenna according to the present invention is manufactured in a state that an external force is not applied, the antenna is not transformed, so that a high frequency characteristic is not changed, and a degradation problem does not occur. So, the present invention is a very reliable invention.

<27> In addition, a good high frequency characteristic and product safety are obtained since a cellular phone antenna is manufactured in such a manner that an antenna device is not transformed.

<28> As the present invention may be embodied in several forms without departing from the spirit or essential characteristics thereof, it should also be understood that the above-described examples are not limited by any of the details of the foregoing description, unless otherwise specified, but rather should be construed broadly within its spirit and scope as defined in the appended claims, and therefore all changes and modifications that fall within the meets and bounds of the claims, or equivalences of such meets and bounds are therefore intended to be embraced by the appended claims.



**【CLAIMS】****【Claim 1】**

In a cellular phone antenna engaged in an interior of a cellular phone,  
a cellular phone antenna, comprising:

an antenna base 10 which is engaged in an interior of a cellular phone;

an antenna 20 which is installed at the antenna base 10;

a connection terminal 30 which is connected with the antenna 20; and

a holder 40 which is attached to the antenna base 10 so that the  
antenna 20 and the connection terminal 20 are connected.

**【Claim 2】**

The antenna of claim 1, wherein said antenna 20 is provided with a  
metallic paste and is printed on the antenna base 10 by a silk screen method.

**【Claim 3】**

A manufacturing method of a cellular phone antenna, comprising:

a step S1 in which a rectangular antenna base 10 is prepared;

a step S2 in which a silk screen device 50 is provided at an upper side  
of the antenna base 10 for printing in a certain shape;

a step S3 in which a metallic paste is provided at the silk screen  
device 50;

a step S4 in which the metallic paste is printed on the upper side of  
the antenna base 10 in a certain shape using a spoon member 60;

a step S5 in which the metallic paste printed on the antenna base 10 is  
hardened and cured; and

a step S6 in which a holder 40 engaged with the connection terminal 30  
is attached at the antenna base 10 so that the connection terminal 30 is  
connected with the antenna 20 hardened on the antenna base 10.

**【Claim 4】**


The method of claim 3, wherein said step for hardening and curing the  
metallic paste is performed using a temperature of 75°C or ultraviolet ray.

**【ABSTRACT】**


A cellular phone antenna and a manufacturing method of the same are disclosed, in which a high frequency characteristic and a product safety are enhanced using a cellular phone antenna which is manufactured by preventing an antenna device from being transformed. The cellular phone antenna comprises an antenna base which is engaged in an interior of a cellular phone; an antenna which is installed at the antenna base; a connection terminal which is connected with the antenna; and a holder which is attached to the antenna base so that the antenna and the connection terminal are connected.

【DRAWINGS】


【Figure 1】

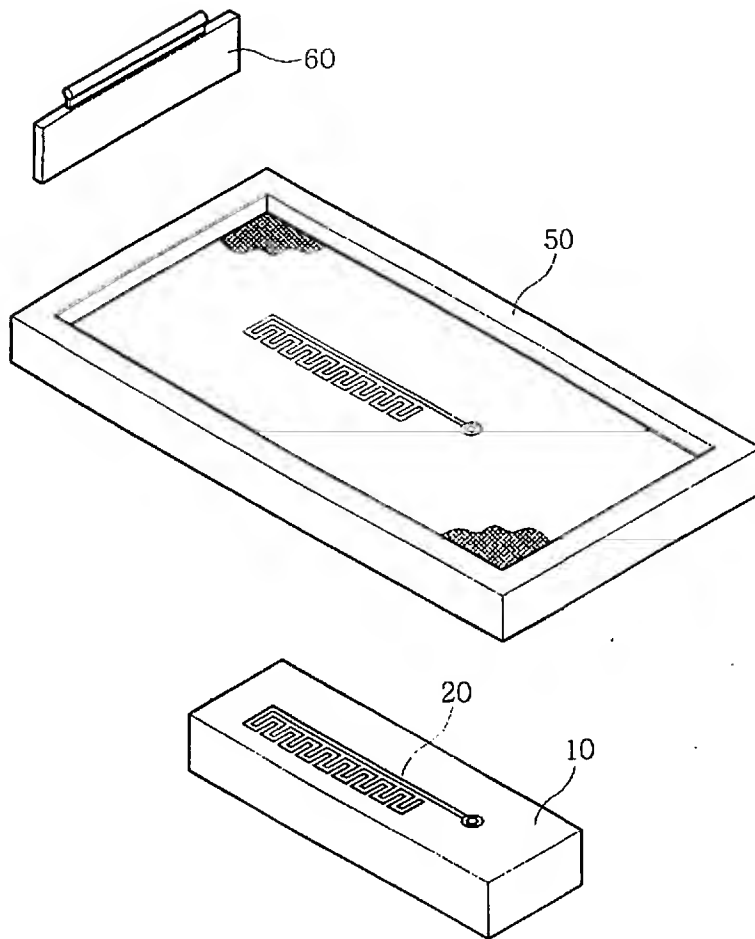

【Figure 2】

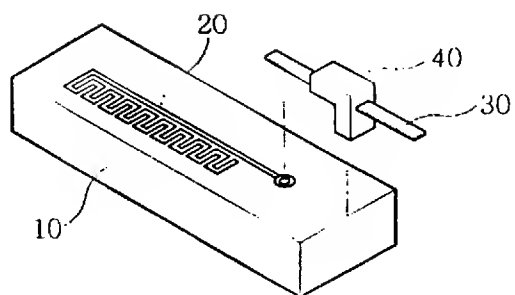

【Figure 3】

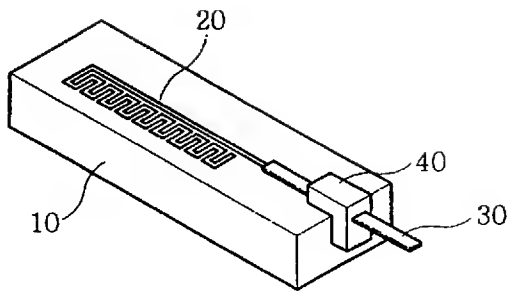

【Figure 4】

